

# DRAWING FOR CUSTOMER

- SPEC.:
- Rated Current:2.0A AC,DC
- Withstand Voltage:500V AC/minute
- Insulation Resistance:1000MΩ min
- Contact Resistance: 20mΩ Max
- Temperature Range:-40℃~+105℃
- Notes:
- Insulator Material:PA6T UL 94V-0
- Contact Material:Copper Alloy

KBP20004-D XX X D V 6 A

D: Double row

Version

Pin No.

Mold No.

包裝方式:

T:TUBE (管裝)

R:REEL (卷裝)

P: PE (袋裝)





A:TRAY (盒裝)

R:Right Angle

V:Vertical

S:SMT

D:DIP

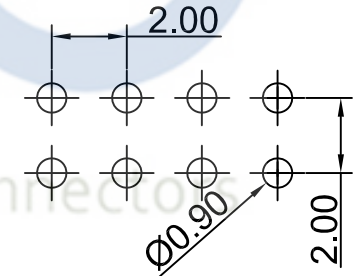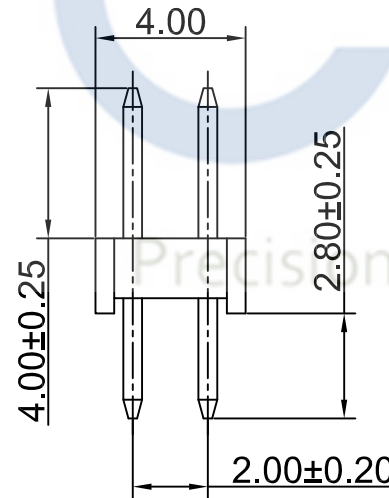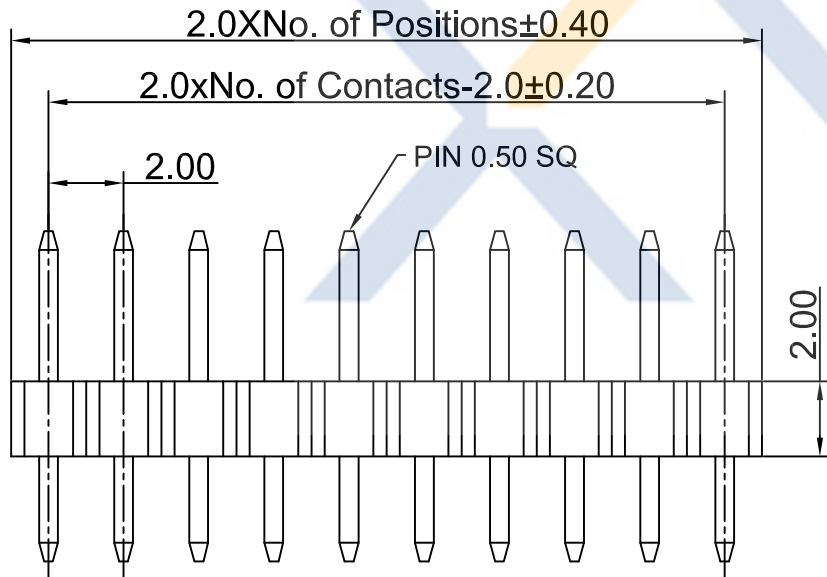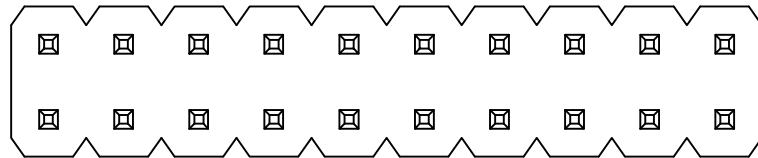

Recommended P.C.Board Hole Layout

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2014-05-13		A	KBP20004-DXXXDV6A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KBP20004-DXXXDV6A		
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史			CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
APPROVED 核准	William	DWG NO. 圖號			PE2010016A	UNIT 單位	mm	PRODUCT NAME 產品名稱	2.00 PIN HEADER DUAL ROWS DIP TYPE BASE 2.00H	