

# DRAWING FOR CUSTOMER

KBP25418-XX X D V 4 A

Pin No.

包裝方式:

T:TUBE (管裝)  
R:REEL (卷裝)  
P: PE (袋裝)  
A:TRAY (盒裝)

Version

Mold No.

R:Right Angle  
V:Vertical





S:SMT  
D:DIP

■SPEC.:

- Rated Current:3.0A AC,DC
- Withstand Voltage:1000V AC/minute
- Insulation Resistance:1000MΩ min
- Contact Resistance: 20mΩ Max
- Temperature Range:-40°C~+105°C

■Material:

- Insulator Material:PBT UL94V-0
- Contact Material:Brass
- Finish:Gold-plated,over Nickel
- Max. Processing Temp:200°C for 30-60seconds  
(220°C for 5seconds)

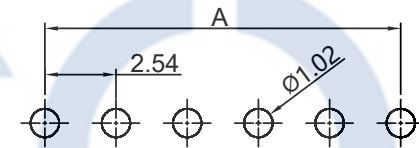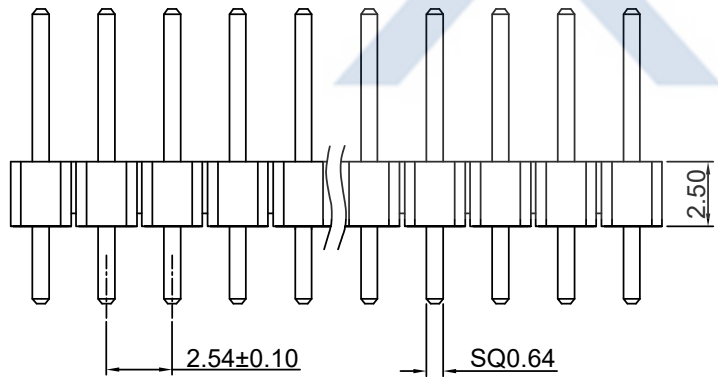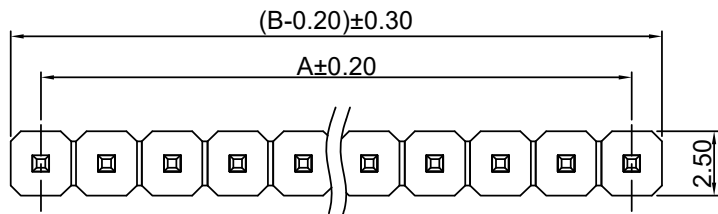

Recommended P.C.Board  
Hole Layout  
(Tolerance:±0.05)

Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B
1	—	2.54	11	25.40	27.94	21	50.80	53.34	31	76.20	78.74
2	2.54	5.08	12	27.94	30.48	22	53.34	55.88	32	78.74	81.28
3	5.08	7.62	13	30.48	33.02	23	55.88	58.42	33	81.28	83.82
4	7.62	10.16	14	33.02	35.56	24	58.42	60.96	34	83.82	86.36
5	10.16	12.70	15	35.56	38.10	25	60.96	63.50	35	86.36	88.90
6	12.70	15.24	16	38.10	40.64	26	63.50	66.04	36	88.90	91.44
7	15.24	17.78	17	40.64	43.18	27	66.04	68.58	37	91.44	93.98
8	17.78	20.32	18	43.18	45.72	28	68.58	71.12	38	93.98	96.52
9	20.32	22.86	19	45.72	48.26	29	71.12	73.66	39	96.52	99.06
10	22.86	25.40	20	48.26	50.80	30	73.66	76.20	40	99.06	101.60

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2020-08-11		A			KBP25418-XXXDV4A	Devin	KBP25418-XXXDV4A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者 Devin	CHECKED 審查 Thomas	PART NO. 料號
						APPROVED 核准 William		DWG NO. 圖號 PE211211A

UNIT 單位	mm	PRODUCT NAME 產品名稱	PH2.54 MALE HEADER SINGLE ROWS DIP TYPE VERTICAL BASE PC3.0 PA6.0 PB6.9
------------	----	----------------------	--