



# DRAWING FOR CUSTOMER

■SPEC.:

- Rated Current:1.5A AC,DC
- Withstand Voltage:500V AC/minute
- Insulation Resistance:1000MΩ min
- Contact Resistance: 20mΩ Max
- Temperature Range:-40℃~+105℃

■Material:

- Insulator Material:PA6T UL 94V-0
- Contact Material:Phosphor Bronze
- Finish:Gold-plated,over Nickel
- Max. Processing Temp:240℃ for 30-60seconds  
(260℃ for 5seconds)

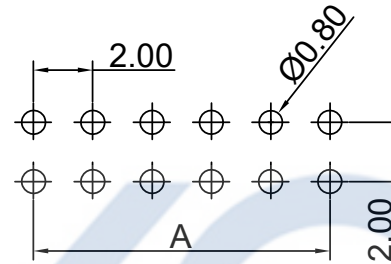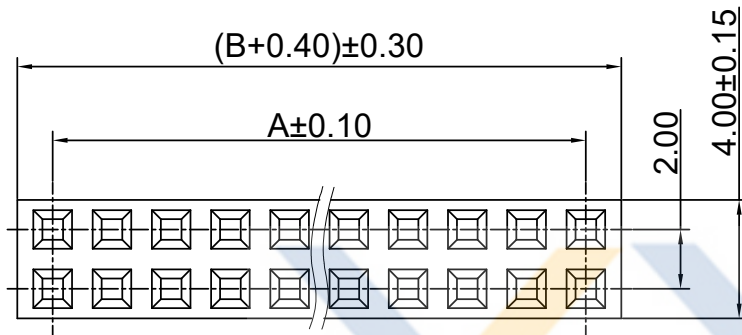

Recommended P.C.Board  
Hole Layout  
(Tolerance:±0.05)

KBM20004-D XX X D V 4 A

D: Double row

Pin No.

包裝方式:

T:TUBE (管裝)

R:REEL (卷裝)

P: PE (袋裝)

A:TRAY (盒裝)



Version

Mold No.

R:Right Angle  
V:Vertical

S:SMT

D:DIP

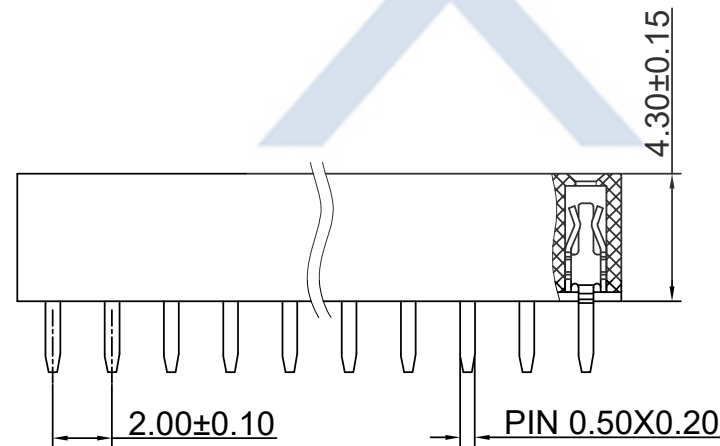

Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B
1		2.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
2	2.00	4.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
3	4.00	6.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
4	6.00	8.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
5	8.00	10.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
6	10.00	12.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
7	12.00	14.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
8	14.00	16.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
9	16.00	18.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
10	18.00	20.00	20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	PART NO. 料號	DWG NO. 圖號	PE2010015A
2014-05-15	A		KBM20004-DXXXDV4A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	UNIT 單位	mm	PRODUCT NAME 產品名稱
						APPROVED 核准	William			PH:2.00 Dual Row Female SMT 180° H4.30mm U型

UNIT 單位: mm  
PRODUCT NAME 產品名稱: PH:2.00 Dual Row Female SMT 180°  
H4.30mm U型