

# DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:250V AC,DC
  - Rated Current:7A AC,DC
  - Withstand Voltage:1500V AC/minute
  - Insulation Resistance:1000MΩ min
  - Contant Resistance:15mΩ Max.
  - Temperature Range:-25℃~+85℃



- Notes:
- Material:B3-PA66 UL94-V2 HF
  - Color:TP-Transparent

KB971- D XX H L 5 A-B3-TP

Double row  
Pin No.  
Housing  
With Lock

Color  
Material  
Version  
Mold No.

Poles	Dimensions (mm)		
	A	B	C
2	---	5.45	7.45
4	4.20	9.90	11.75
6	8.40	14.00	16.00
8	12.60	18.30	20.35
10	16.80	22.60	24.55
12	21.00	26.80	28.75
14	25.20	30.90	32.95
16	29.40	35.10	37.15
18	33.60	39.40	41.55
20	37.80	43.85	45.85
22	42.00	47.90	49.90
24	46.20	52.10	54.15

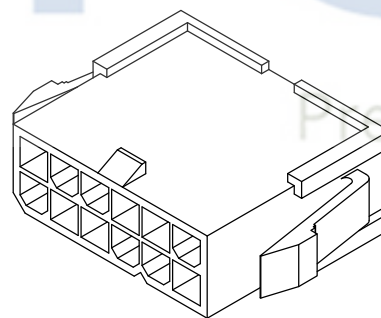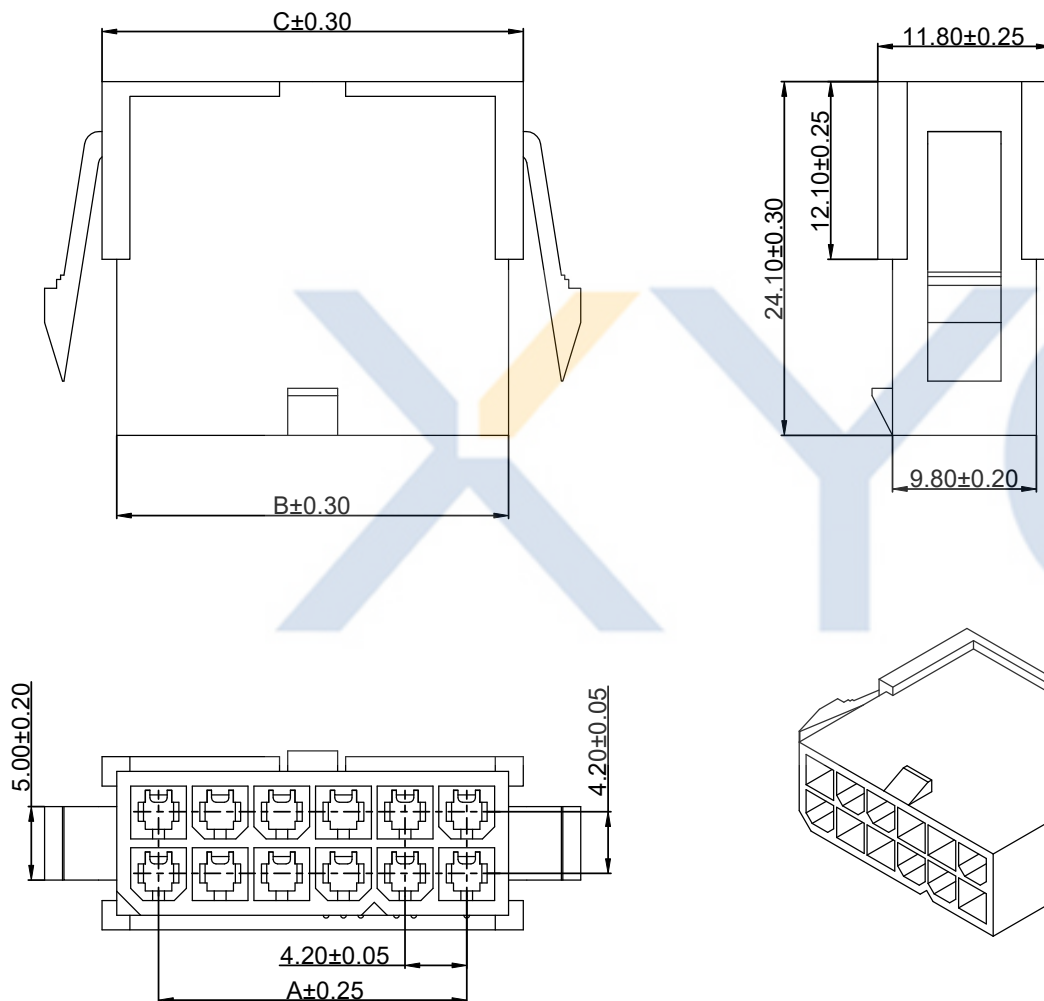

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-07-30	A		KB971- DXXHL5A-B3-TP	Devin	TOLERANCE 公差	DRAWING 设计者	Devin	KB971- DXXHL5A-B3-TP
DATE 日期	VER 版本	CHANGE HISTORY 变更历史	CHANGED NAME 修改後料號	DRAWING 变更者	.X= $\pm 0.30$ .XX= $\pm 0.20$ .XXX= $\pm 0.10$	CHECKED 审查	Thomas	PART NO. 料号
						APPROVED 核准	William	DWG NO. 图号
								PE191214A

UNIT 单位	mm	PRODUCT NAME 产品名称	5559 PH4.2mm Double Row Housing With wings-female
------------	----	----------------------	--