

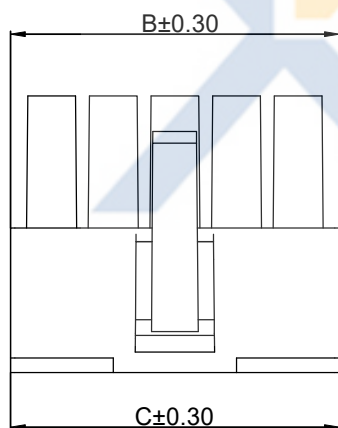
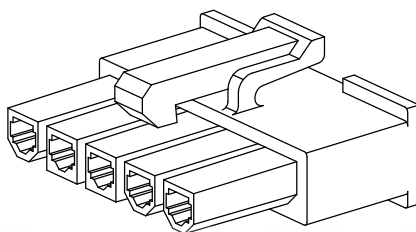



DRAWING FOR CUSTOMER

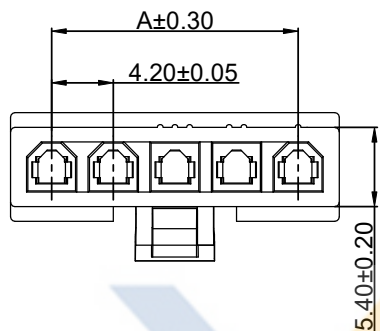

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:7A AC,DC
 - Withstand Voltage:1500V AC/minute
 - Insulation Resistance:1000MΩ min
 - Contant Resistance:15mΩ Max.
 - Temperature Range:-25℃~+85℃

- Notes:
- Material:B3-PA66 UL94-V2 HF
 - Color:TP-Transparent

KB970- XX H L 5 A-B3-TP

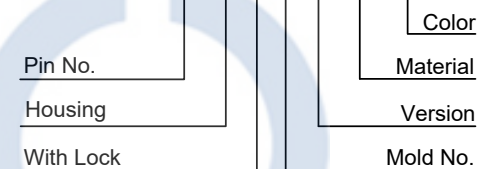

Poles	Dimensions (mm)		
	A	B	C
2	4.20	9.60	9.80
3	8.40	13.80	14.00
4	12.60	18.00	18.20
5	16.80	22.20	22.40

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 变更历史	CHANGED NAME 修改後料號	DRAWING 变更者	TOLERANCE 公差	DRAWING 设计者	Devin	KB970- XXHL5A-B3-TP
2013-07-30	A		KB970- XXHL5A-B3-TP	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 审查	Thomas	PART NO. 料号
						APPROVED 核准	William	DWG NO. 图号
								PE191207A

UNIT 单位	mm	PRODUCT NAME 产品名称	5557 PH4.2mm Single Row Housing with lock-Male