



DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:5A AC,DC
 - Withstand Voltage:1000V AC/minute
 - Contact Resistance:10mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25°C~+85°C



- Material:
- Insulator:PA66 UL94V-2
 - Color:WH-White,BK-Black

KB9302-XXHL6A-XX

Pin No. Color
 Housing Version
 Mold No.
 With Lock

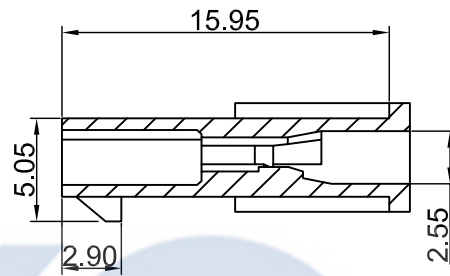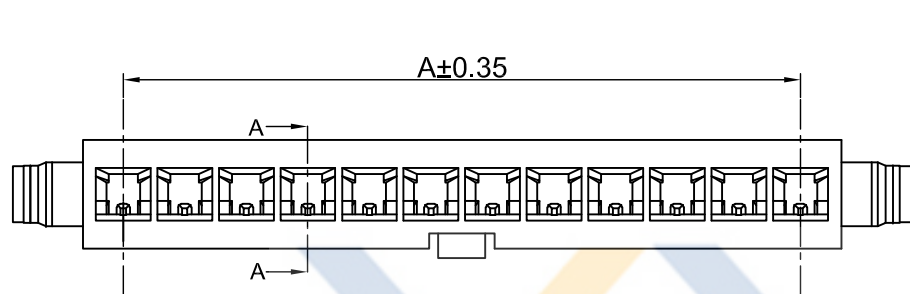

Section:A-A

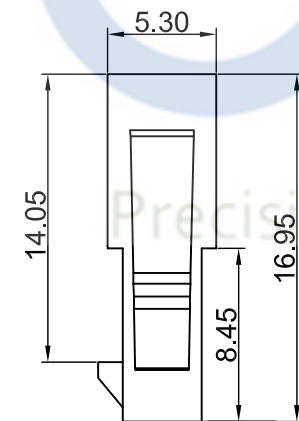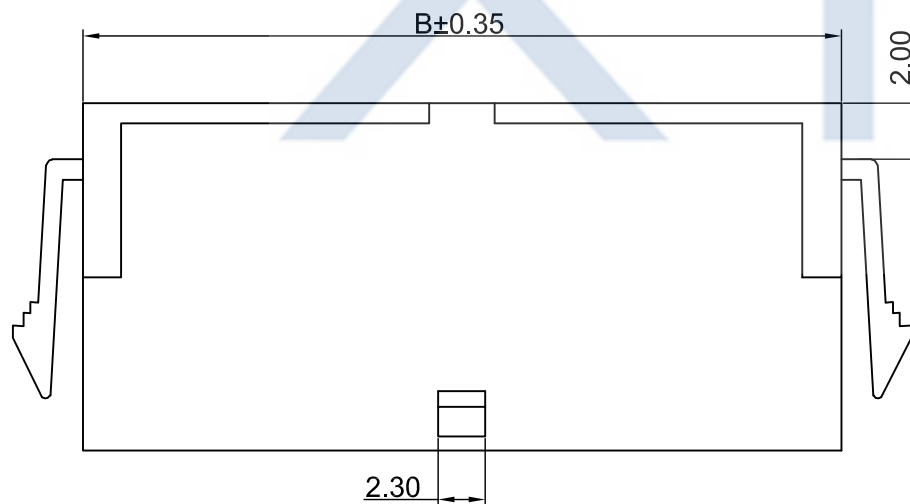

Poles	Dimensions(mm)	
	A	B
02	3.00	7.00
03	6.00	10.00
04	9.00	13.00
05	12.00	16.00
06	15.00	19.00
07	18.00	22.00
08	21.00	25.00
09	24.00	28.00
10	27.00	31.00
11	30.00	34.00
12	33.00	37.00

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

TOLERANCE 公差					DRAWING 設計者	Devin	KB9302-XXHL6A-XX			
2015-10-16	A	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	CHECKED 審查	Thomas	PART NO. 料號			
DATE 日期	VER 版本				APPROVED 核准	William	DWG NO. 圖號	PE211206A	UNIT 單位	mm
									PRODUCT NAME 產品名稱	43640 PH3.0mm Wire To Wire Single row Housing-Female

