

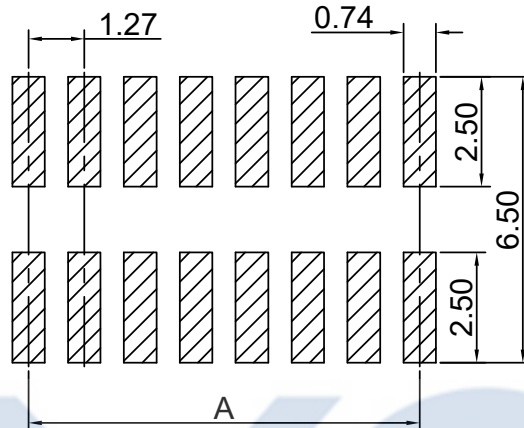
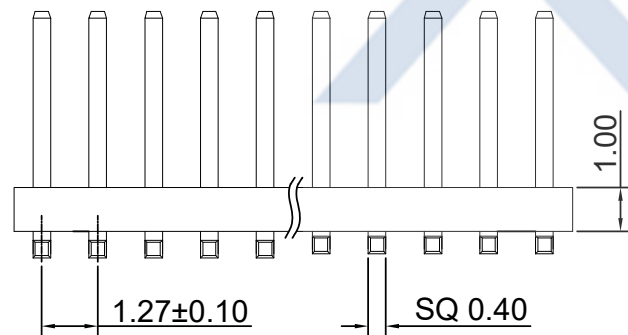


DRAWING FOR CUSTOMER

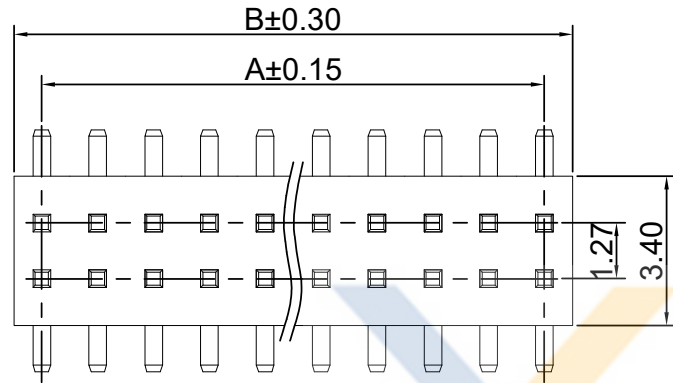

Recommended P.C.Board Hole Layout
(Tolerance:±0.05)

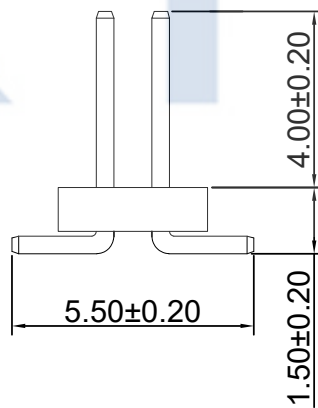

- SPEC.:
- Rated Current:1.0A AC,DC
 - Withstand Voltage:500V AC/minute
 - Insulation Resistance:1000MΩ min
 - Contact Resistance: 20mΩ Max
 - Temperature Range:-40℃~+105℃

- Material:
- Insulator Material:PA6T UL 94V-0
 - Contact Material:Brass
 - Finish:Gold-plated,over Nickel
 - Max. Processing Temp:240℃ for 30-60seconds (260℃ for 5seconds)

KBP12704-D XX X S V 4 A

Double row

Pin No.

Version

Mold No.

R:Riht Angle

V:Vertical

包裝方式:

T:TUBE (管裝)

R:REEL (卷裝)

P: PE (袋裝)

S:SMT

D:DIP

Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B
1	—	—	11	12.70	13.97	21	25.40	26.67	31	38.10	39.37	41	50.80	52.07
2	1.27	2.54	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64	42	52.07	53.34
3	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91	43	53.34	54.61
4	3.81	5.08	14	16.51	17.78	24	29.21	30.48	34	41.91	43.18	44	54.61	55.88
5	5.08	6.35	15	17.78	19.05	25	30.48	31.75	35	43.18	44.45	45	55.88	57.15
6	6.35	7.62	16	19.05	20.32	26	31.75	33.02	36	44.45	45.72	46	57.15	58.42
7	7.62	8.89	17	20.32	21.59	27	33.02	34.29	37	45.72	46.99	47	58.42	59.69
8	8.89	10.16	18	21.59	22.86	28	34.29	35.56	38	46.99	48.26	48	59.69	60.96
9	10.16	11.43	19	22.86	24.13	29	35.56	36.83	39	48.26	49.53	49	60.96	62.23
10	11.43	12.70	20	24.13	25.40	30	36.83	38.10	40	49.53	50.80	50	62.23	63.50

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2017-11-05	A		KBP12704-DXXXSV4A	Devin
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	Devin
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas
	APPROVED 核准	William

KBP12704-DXXXSV4A	
PART NO. 料號	UNIT 單位
DWG NO. 圖號	mm
PE171105A	mm

PRODUCT NAME 產品名稱

PH:1.27 Male Double Row SMT W3.40 PC5.5 PA4.00 PB1.50
--