


# DRAWING FOR CUSTOMER

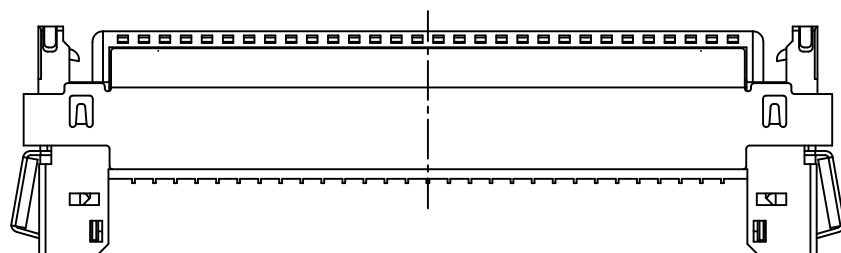

KB902-30 H L X D - XXX

Pin No.

Housing

With Lock

Logo

Material

Version



Mold No.

**SPEC.:**

- Rated Voltage: 200V AC, DC
- Rated Current: 1A AC, DC
- Withstand Voltage: 500V AC/minute
- Contact Resistance: 40mΩ max
- Insulation Resistance: 100MΩ min
- Temperature Range: -40°C ~ +85°C
- Applicable wire: AWG#28~32
- QTY.: 500PCS/Plate

**Notes:**

- Housing: PA66 UL94V-0 (white)
- Shell: Stainless Steel
- Latch: Stainless Steel

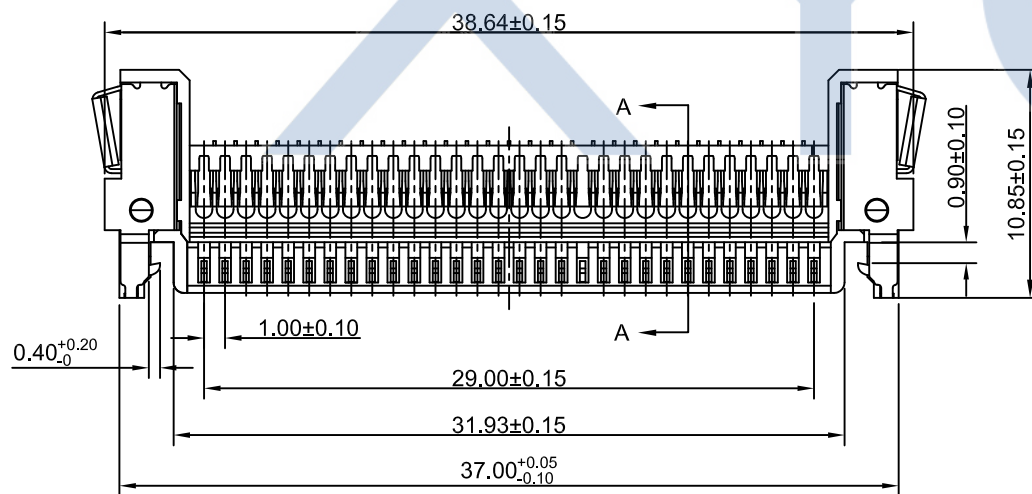

Section:A-A

## XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-08-16	D-1	调整图纸尺寸，缩减耳朵总长度	KB902-30HLXD-XXX	譚火秦
2014-03-21	D	增加功能区厚度尺寸	KB902-30HLXD	譚火秦
2013-05-30	A		KB902-30HLXA	譚火秦
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	譚火秦
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	譚宏
	APPROVED 核准	莊倫華

KB902-30HLXD-XXX	
PART NO.	料號
DWG NO. 圖號	PE21019D

UNIT 單位	mm	PRODUCT NAME 產品名稱
		FI-X PH1.00mm Wire To Board Housing with lock